Rec'd PCT/PTO 25 FEB 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 15 July 2004 (15.07.2004)

PCT

(10) International Publication Number WO 2004/058624 A1

(51) International Patent Classification⁷:

B66D 1/00

(21) International Application Number:

PCT/US2002/041502

(22) International Filing Date:

26 December 2002 (26.12.2002)

(25) Filing Language:

English

(26) Publication Language:

English

- (71) Applicant (for all designated States except US): HAN-LON ENGINEERING, INC. [US/US]; 3185-F2 Airway Avenue, Costa Mesa, CA 92626 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): HANLON, Mark, T. [US/US]; 2839 Velasco Lane, Costa Mesa, CA 92626 (US).
- (74) Agents: FISH, Robert et al.; RUTAN & TUCKER, LLP, 611 Anton Blvd., 14th Floor, Costa Mesa, CA 92626 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CEILING MOUNTED LIFT

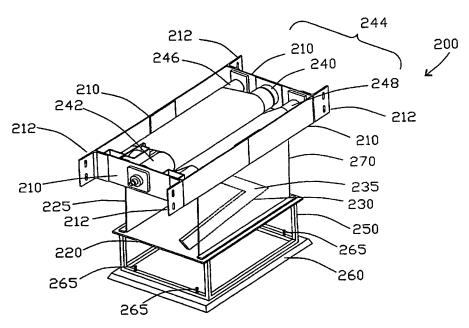

(57) Abstract: A ceiling mounted lift (200), of the type having a support frame (210) housing a drive mechanism (240) that operates to raise and lower a lifting platen (22) using a fabric drive roller (244), has a stabilizer (230), and is small enough to fit between standard ceiling joists. Preferred stabilizers have free movement in substantially only one plane and such arrangement is aided by the use of a bearing and hardened washers. Lifts according to the present invention can safely have a travel distance of up to 50 feet, and can manage payloads up to 1000 pounds.